



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the application is now proceeding in the name as identified herein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *AmBrewster*

Dated 9 October 2003



L



INVESTOR IN PEOPLE

GB 0224784.9

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

BLUEWATER ENERGY SERVICES B.V.,  
Marsstraat 33,  
2132 HR Hoofddorp,  
Netherlands

Incorporated in the Netherlands,

[ADP No. 08619488001]



Patents Act 1977  
(Rule 16)

## Request for grant of a patent

*(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Concept House  
Cardiff Road  
Newport  
South Wales NP10 8QQ

1. Your reference SEM/61591/000

2. Patent application number 0224784.9  
*(The Patent Office will fill in this part)*250CT02 E758401-1 D02882  
P01/7700 0.00-0224784.93. Full name, address and postcode of the or of each applicant *(underline all surnames)*Bluewater Terminal Systems NV  
Zeelandia Office Park  
Kaya WFG (Jombi) Mensing 18  
Willemstad  
Curacao/Netherlands AntillesPatents ADP number *(if you know it)* 07398 46 4001

If the applicant is a corporate body, give the country/state of its incorporation

Netherlands Antilles

4. Title of the invention

Apparatus for Mooring Vessels Side-by-Side

5. Name of your agent *(if you have one)*

BOULT WADE TENNANT

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*VERULAM GARDENS  
70 GRAY'S INN ROAD  
LONDON WC1X 8BTPatents ADP number *(if you know it)*

42001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number  
*(if you know it)*Date of filing  
*(day/month/year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
*(day / month / year)*

8. Is a statement of inventorship and of right to grant of a patent required in support of this request?

Yes

*(Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or*
- b) there is an inventor who is not named as an applicant, or*
- c) any named applicant is a corporate body.*

*See note (d))*

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 8  
Claim(s) 3  
Abstract 0  
Drawing(s) 3 + 3

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1


Any other documents (Please specify)

11

I/We request the grant of a patent on the basis of this application.

Signature

Date



24 October 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Sarah Merrifield  
020 7430 7500

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# APPARATUS FOR MOORING VESSELS SIDE-BY-SIDE

5 The present invention relates to apparatus for mooring two vessels side-by-side at an offshore location.

10 When it is necessary to moor two vessels together offshore, two methods are commonly used in the industry. The first is side-by-side mooring and the second is stern-to-bow mooring, often referred to as tandem mooring. Each of these methods has its particular application, with tandem mooring being applied when the sea conditions are too high for side-by-side mooring.

15 Traditionally, with side-by-side mooring systems, both vessels are more or less tightly pulled together with their sides against each other, separated only by floating fenders, typically of air or foam filled rubber. A common problem is that very often the vessels tend to roll as dictated by each vessel's exposure to the waves. In some cases, the roll of the two vessels will not be synchronised and the potential for damage exists. In addition, the fenders and mooring lines are worked to their limits. Since side-by-side mooring typically employs eight to ten mooring lines between the two vessels, arranged over the length of the vessels, a significant hazard to the operational staff is also present. Moreover, the procedure to establish side-by-side mooring is time consuming.

35 The present invention provides apparatus for mooring first and second floating vessels side-by-side, the first vessel being moored to the seabed by a single point mooring system, the apparatus comprising

an arm having a proximal end and a distal end, the arm being mountable on a first vessel for rotation about a vertical axis and with the distal end projecting outwardly from the first vessel in use, a  
5 substantially inelastic mooring line attached to the distal end of the arm and securable to a second vessel in use, resilient means operable to allow limited rotation of the arm about the axis in a first direction in response to tension on the mooring line  
10 which exceeds a predetermined value and to automatically restore the arm to its former position upon reduction of the tension below the predetermined value, and wherein the arm is freely rotatable about the axis in a second direction opposite to the first  
15 direction.

Preferably, the resilient means comprises a piston and cylinder mountable to the first vessel adjacent the arm such that rotation of the arm in the  
20 first direction brings the arm into contact with the piston and to compress the piston into the cylinder when the tension on the mooring line exceeds the predetermined value, and wherein the cylinder is operable to extend the piston upon reduction of the  
25 tension below the predetermined value.

Alternatively, the resilient means may comprise a stop member mountable on the first vessel such that rotation of the arm in the first direction brings the  
30 arm into contact with the stop member, and a piston and cylinder mounted on the distal end of the arm between the arm and the mooring line and operable to extend when the tension on the mooring line exceeds the predetermined value, and to retract upon reduction  
35 of the tension below the predetermined value.

The arm is preferably mountable on the first



vessel at a location towards the bow.

5 A fender means is preferably mountable on the first vessel on the same side as the arm and located approximately two thirds of the way towards the stern.

10 A loading means for transferring fluid between the first vessel and a second vessel moored side-by-side is preferably mountable on the first vessel at a location between the arm and the fender means.

The loading means may include catenary hoses or rigid piping.

15 The arm is preferably dimensioned such that in use the separation between the first and second vessels is approximately one vessel's width.

20 Conveniently, the mooring line comprises a hawser.

25 The apparatus may advantageously be used with a second vessel having lateral thrust producing means located in its stern region, in which case the apparatus further comprises a second mooring line attachable in the stern region of the first vessel and securable to the stern region of the second vessel.

30 In another aspect, the invention also provides a floating vessel incorporating apparatus as described above for mooring the vessel to a second vessel.

35 In this case, the floating vessel preferably further comprises a single point mooring system attachable to the bow region of the first vessel and lateral thrust producing devices in the stern region of the first vessel.

The first vessel preferably also includes a  
5. single point mooring system attached to the bow region  
and lateral thrust producing means located in the  
stern region.

The invention will now be described in detail, by  
10 way of example only, with reference to the  
accompanying drawings in which:

Figure 1 is a plan view of a conventional side-  
by-side mooring;  
15

Figure 2 is a plan view of a conventional tandem  
mooring;

Figure 3 is a plan view of a first embodiment of  
20 apparatus for side-by-side mooring in accordance with  
the present invention; and

Figure 4 is a plan view of a second embodiment of  
apparatus for side-by-side mooring system in  
25 accordance with the present invention.

Figure 1 shows a conventional side-by-side  
mooring system for two vessels 10,12. The first  
vessel 10 is typically permanently moored at an  
30 offshore location, for example by a single point  
mooring system 14 at the bow, as is well known in the  
art. A plurality of mooring lines 16 are arranged in  
a crossed fashion to moor a visiting second vessel 12  
to the first vessel 10. A number of fenders 18 are  
35 located between the vessels 10,12.

Figure 2 shows a conventional tandem mooring

system in which the first vessel 10, with the single point mooring 14 at its bow, is moored by a line 16 from its stern to the bow of the visiting vessel 12.

Figure 3 shows a first embodiment of the present invention, using the same reference numerals as above where appropriate. In this case, the first vessel 10 carries a mooring arm 20 mounted on the vessel at a pivot 22 for rotation about a substantially vertical axis. The arm 20 is located towards the bow region of the vessel 10. A fender arrangement 18 is secured to the vessel 10, preferably at about two-thirds of the length of the vessel aft of the bow, on the same side as the mounting mooring arm 20.

In use, the mooring arm 20 projects laterally outwardly from the vessel 10. A substantially inelastic mooring line, typically a hawser 24 made from plastic fibres, is secured to the distal end of the arm 20, and in use is moored to the bow of the visiting vessel 12. The hawser 24 is designed to be relatively short so that lateral movements of the bow of the visiting vessel 12 are restricted. Additionally, it is designed with low elasticity such that it does not have sufficient elasticity to allow the visiting vessel 12 to go through its natural motions in the horizontal plane along the longitudinal axis of the visiting vessel 12.

The mooring arm 20 extends proximally of the pivot 22 over the deck of the vessel 10. As described further below, a piston 26, which is reciprocable in a hydraulic oil/gas cylinder 28 secured to the vessel 10, is located adjacent the proximal end of the arm 20.

If the action of wind and waves causes the visiting vessel 12 to move away from the arm 20

towards the left-hand side in Figure 3 this will pull on the distal end of the arm 20 and tend to rotate it anticlockwise as seen in Figure 3. This will cause the proximal end of the arm 20 to push against the piston 26. When the tension on the hawser 24 and thus the load on the arm 20 exceeds a predetermined value, the cylinder 28 yields and allows the piston 26 to be pushed in. This in turn allows the arm 20 to rotate anti-clockwise as viewed in Figure 3 to the position indicated by the dotted lines 20'. When the load on the hawser 24 subsides, the piston 26 extends out of the cylinder 28 and rotates the arm 20 clockwise in Figure 3 to resume its original position.

If, on the other hand, the visiting vessel 12 moves towards the arm 20 and the right-hand side of Figure 3, the arm 20 would present an obstacle and risk damage. To avoid this problem, the proximal end of the arm 20 is not connected to the piston 26 or the cylinder 28. Therefore, the arm 20 can rotate freely clockwise as viewed in Figure 3 to the position shown in dotted lines 20''. Thus, if the visiting vessel 12 rides right up to the arm 20, it will simply push the arm out of the way.

In this way, the piston 26 and cylinder 28 effectively act to give some degree of elasticity to the hawser 24 if it is placed in tension above a certain level, to provide an "elastic" stroke as shown in Figure 3. This effect can also be achieved in other ways. For example, a stop member could be located on the deck of a vessel 10 adjacent to the proximal end of the arm 20, with which the arm 20 makes contact if it rotates anticlockwise. A piston and cylinder arrangement could then be provided at the distal end of the arm 20, between the arm 20 and the hawser 24, which extends when the load on the hawser

24 exceeds the given value and contracts when the load subsides.

5 The mooring arm 20 and hawser 24 are typically dimensioned such that the visiting vessel 12 is moored at about one vessel's width away from the first vessel 10. The fender 18 prevents the vessels 10, 12 contacting each other if relative yaw motions occur between them.

10 Loading means 30 is fitted to the first vessel 10 at a location to coincide with the midship loading manifolds 32 of the second vessel 12. Due to the relatively large gap between the two vessels 10, 12, 15 catenary hoses 34 may be used to advantage to connect the loading means 30 to the manifolds 32, particularly if cryogenic products are to be transferred. However, traditional rigid piping transfer systems may also be employed.

20 Figure 4 illustrates an alternative embodiment of the present invention. As in Figure 3, the first vessel 10 includes a rotatably mounted mooring arm 20 and hawser 24 for mooring to the bow of a visiting 25 vessel 12. Although not shown in Figure 4, the piston 26, cylinder 28, fender 18 and loading means 30 as in Figure 3 may also be present. In addition, a second hawser 36 is attached towards the stern of the first vessel 10 and secured in use to the visiting vessel 30 12, also towards its stern. Advantageously, the visiting vessel 12 is fitted with some form of side propulsion means 38 which acts to produce thrust laterally, at the stern end. This can be activated to maintain the second hawser 36 taut between the two 35 vessels 10, 12 so that the visiting vessel 12 will not contact any fender system 18 but also not drift away from the first vessel 10.

A further improvement to the overall system can be achieved if the first vessel 10 is also provided with a single point mooring system 14 at the bow and transversely acting thrust producing devices 40 at the stern. These can be used to rotate the first vessel 10 about the single point mooring 14 to optimise its overall heading such that a situation of least relative movement is obtained. This is more efficient and safe and minimises the loads placed upon the mooring system and transfer equipment.

Thus, the present invention provides an improved apparatus for side-by-side mooring of two vessels which is safer and more efficient than known systems.

**CLAIMS:**

1. Apparatus for mooring first and second floating vessels side-by-side, the first vessel being  
5 moored to the seabed by a single point mooring system, the apparatus comprising an arm having a proximal end and a distal end, the arm being mountable on a first vessel for rotation about a vertical axis and with the distal end projecting outwardly from the first vessel  
10 in use, a substantially inelastic mooring line attached to the distal end of the arm and securable to a second vessel in use, resilient means operable to allow limited rotation of the arm about the axis in a first direction in response to tension on the mooring  
15 line which exceeds a predetermined value and to automatically restore the arm to its former position upon reduction of the tension below the predetermined value, and wherein the arm is freely rotatable about the axis in a second direction opposite to the first  
20 direction.

2. Apparatus as claimed in claim 1, wherein the resilient means comprises a piston and cylinder mountable to the first vessel adjacent the arm such  
25 that rotation of the arm in the first direction brings the arm into contact with the piston and to compress the piston into the cylinder when the tension on the mooring line exceeds the predetermined value, and wherein the cylinder is operable to extend the piston  
30 upon reduction of the tension below the predetermined value.

3. Apparatus as claimed in claim 1, wherein the resilient means comprises a stop member mountable on  
35 the first vessel such that rotation of the arm in the first direction brings the arm into contact with the stop member and a piston and cylinder mounted on the

distal end of the arm between the arm and the mooring line and operable to extend when the tension on the mooring line exceeds the predetermined value, and to retract upon reduction of the tension below the predetermined value.

4. Apparatus as claimed in any preceding claim, wherein the arm is mountable on the first vessel at a location towards the bow.

5. Apparatus as claimed in claim 4, further comprising fender means mountable on the first vessel on the same side as the arm and located approximately two thirds of the way towards the stern.

6. Apparatus as claimed in claim 5, further comprising loading means for transferring fluid between the first and second vessels, mountable on the first vessel between the arm and the fender means.

7. Apparatus as claimed in claim 6, wherein the loading means includes catenary hoses.

8. Apparatus as claimed in claim 6, wherein the loading means includes rigid piping.

9. Apparatus as claimed in any preceding claim wherein the arm is dimensioned such that in use the separation of the first and second vessels is approximately equal to one vessel's width.

10. Apparatus as claimed in any preceding claim wherein the mooring line comprises a hawser.

11. Apparatus as claimed in any preceding claim, for use with a second vessel having lateral thrust producing means located at its stern, the apparatus



further comprising a second mooring line attachable in a stern region of the first vessel and securable to the stern region of the second vessel.

5           12. A floating vessel incorporating apparatus for mooring the vessel to a second vessel as claimed in any preceding claim.

10           13. A floating vessel as claimed in claim 12, further comprising a single point mooring system attachable to the bow region of the first vessel and lateral thrust producing devices in the stern region of the first vessel.

15           14. Apparatus for mooring two vessels side-by-side substantially as hereinbefore described and with reference to the accompanying drawings.

20

25



1/3

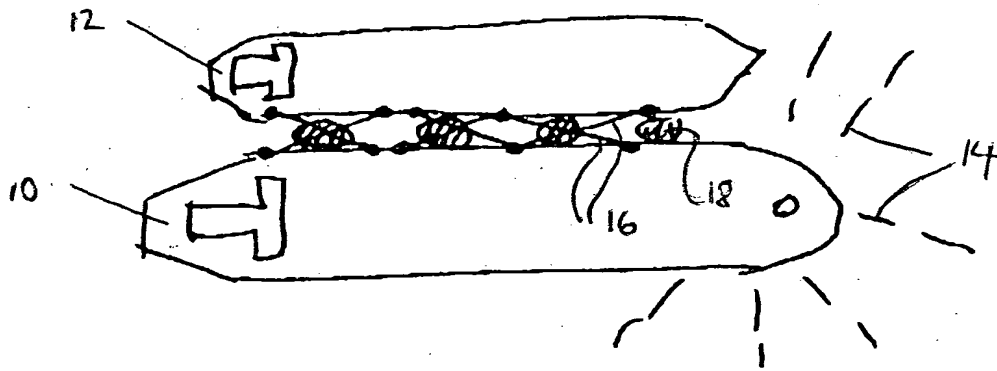


Fig 1

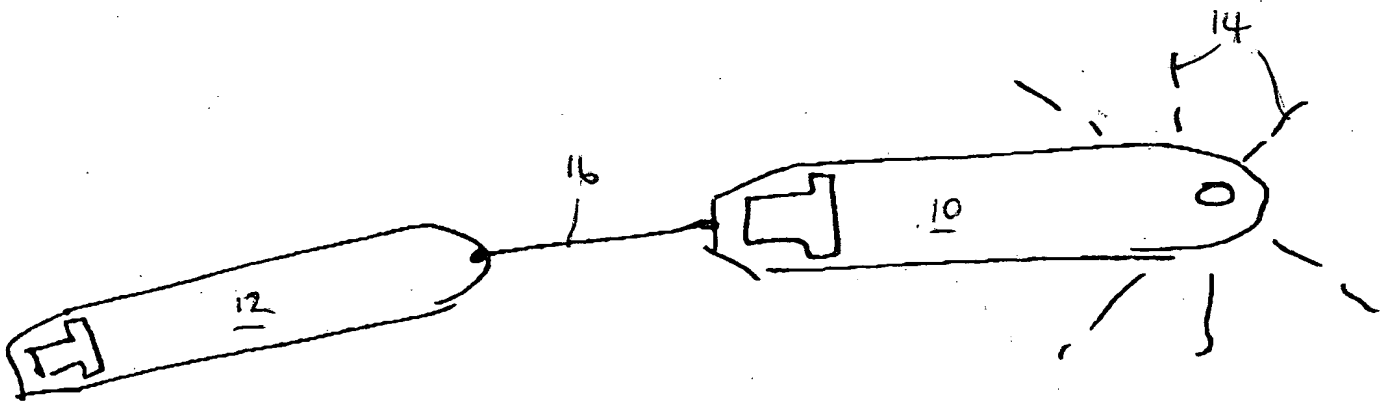


Fig 2





\_\_\_\_\_



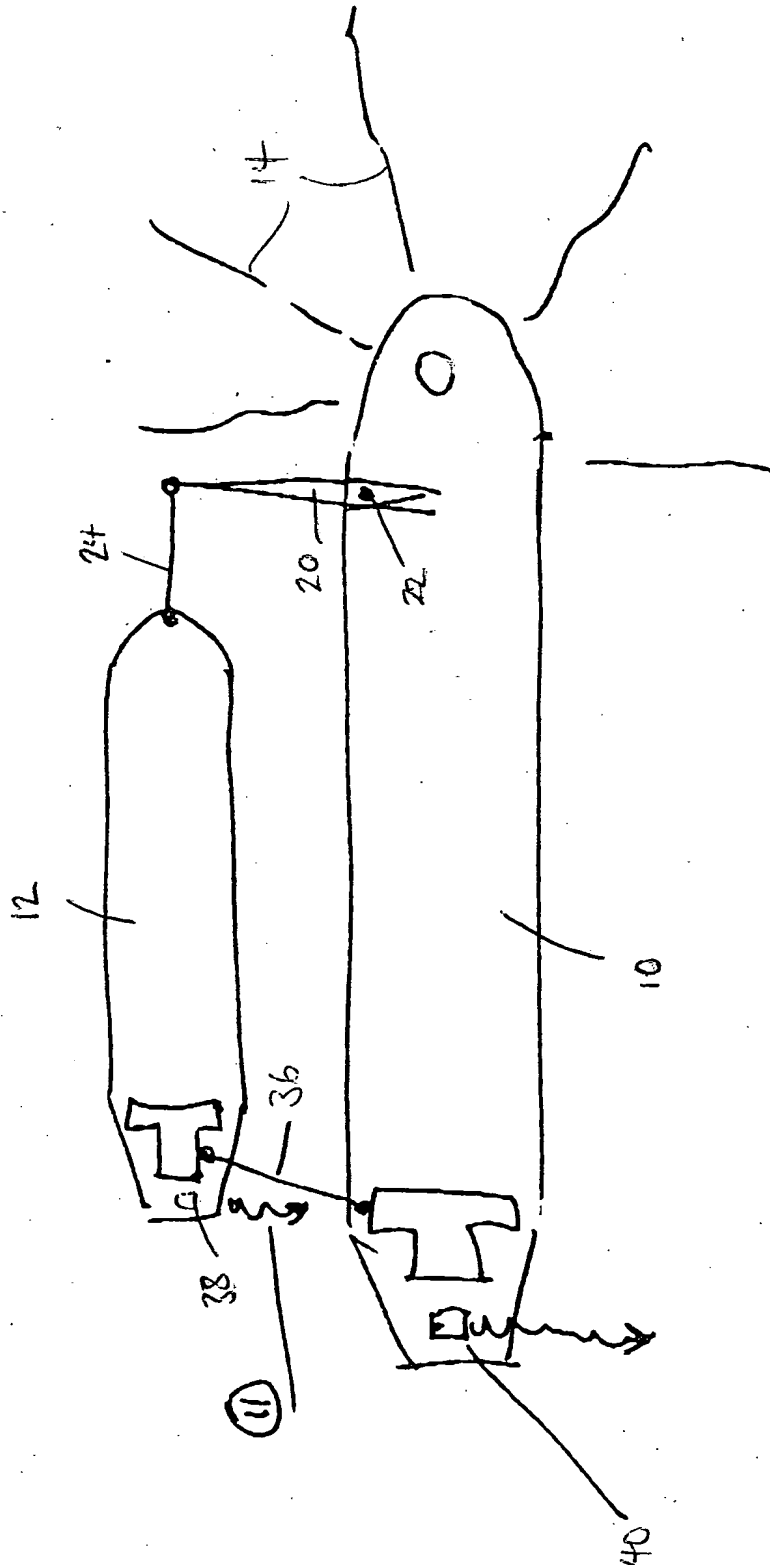


fig 4

